

6446820




FIG. 1

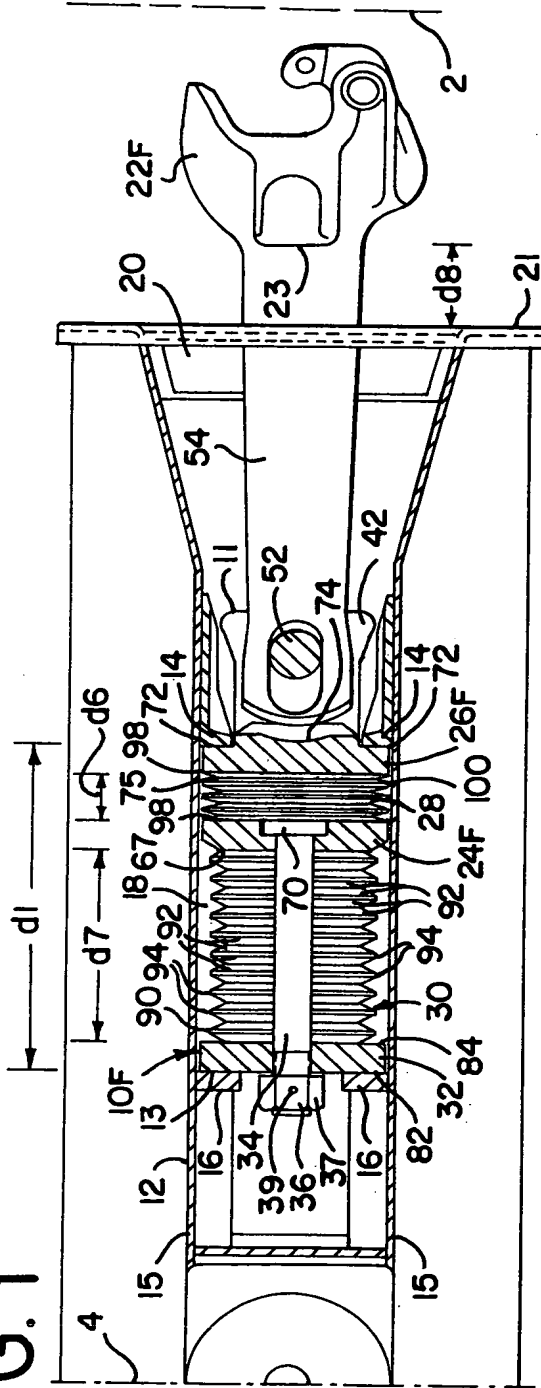


FIG. 2

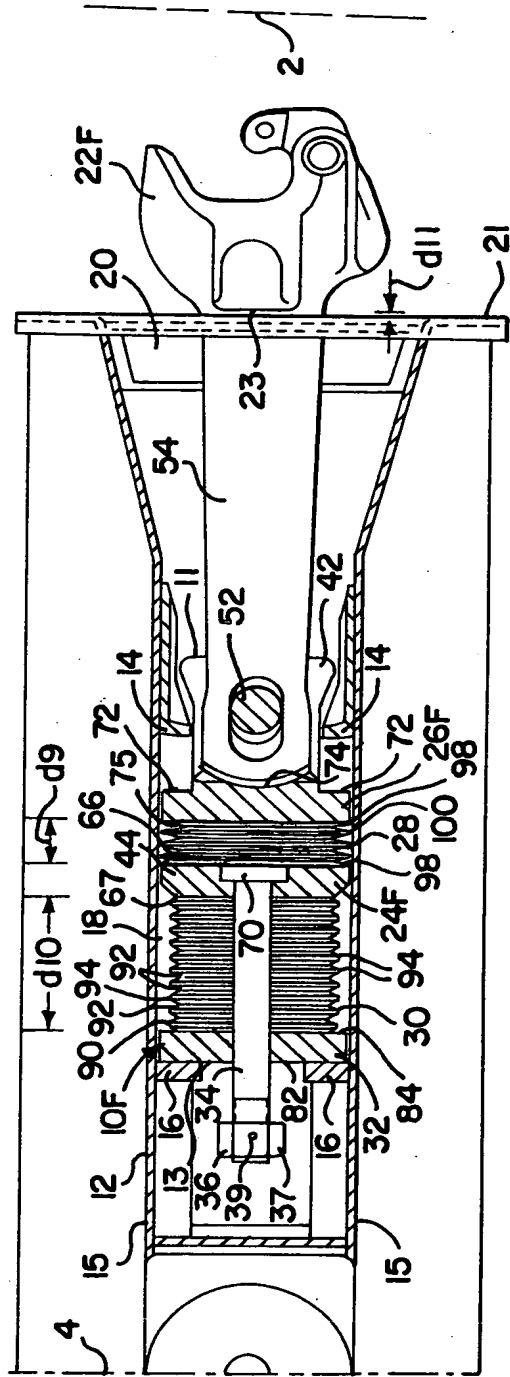




FIG. 3

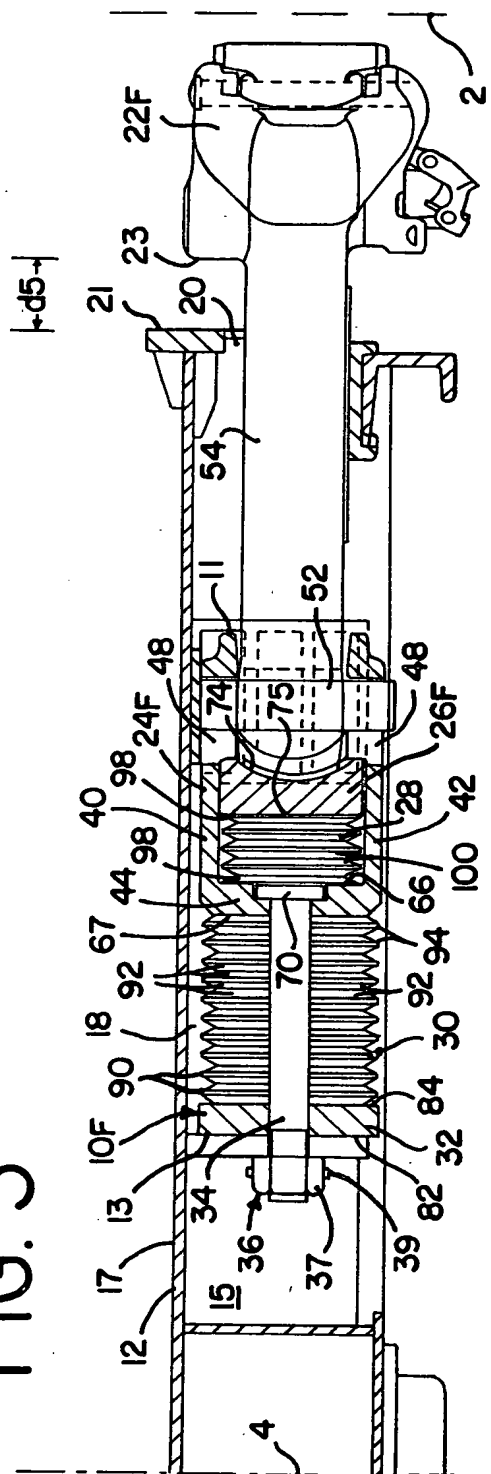


FIG. 4

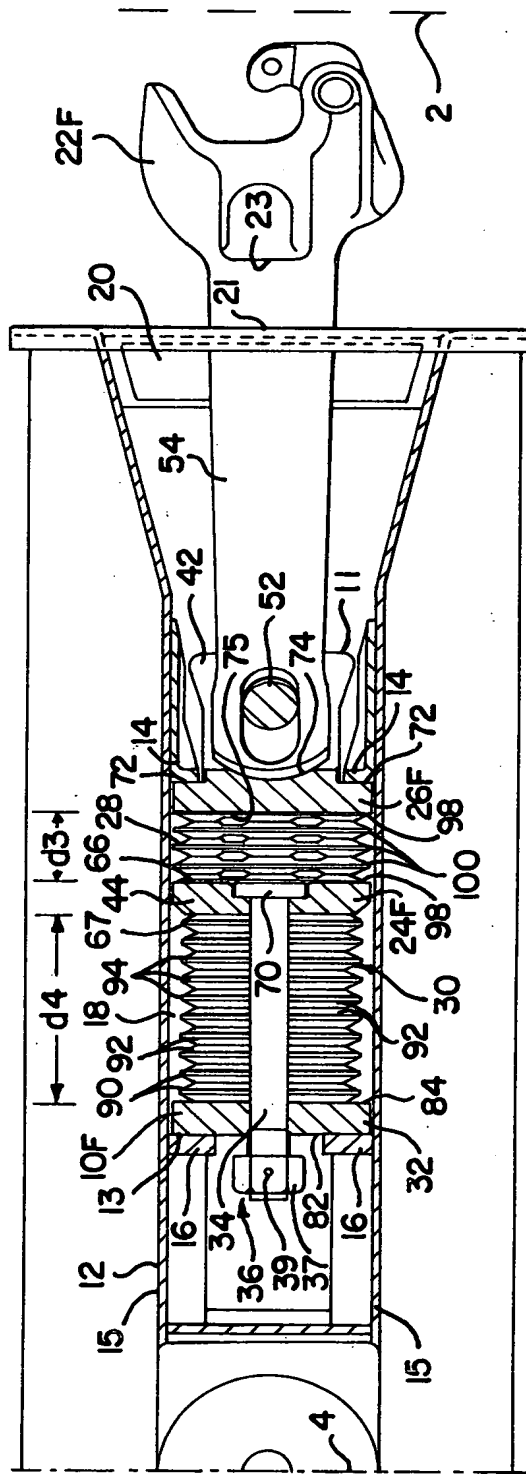






FIG. 7

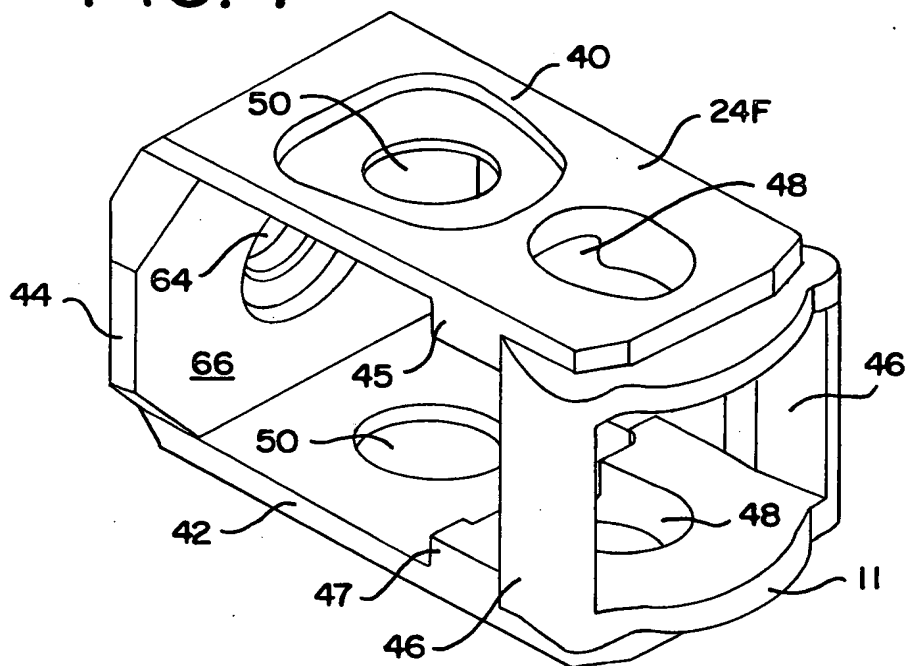


FIG. 8

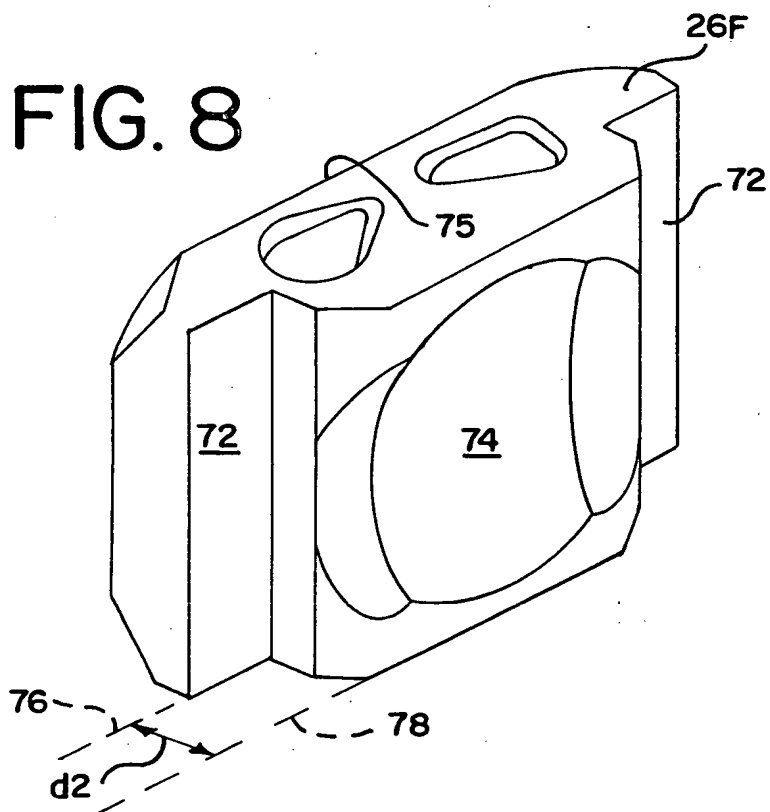




FIG. 9

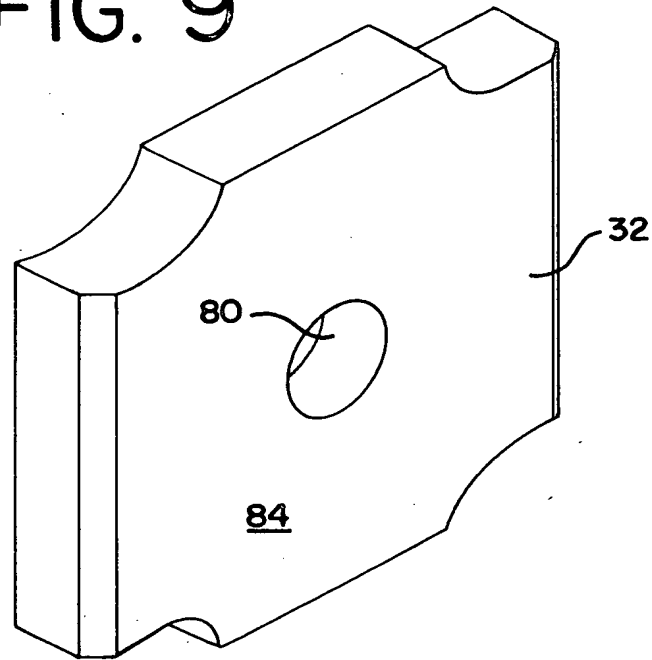


FIG. 10

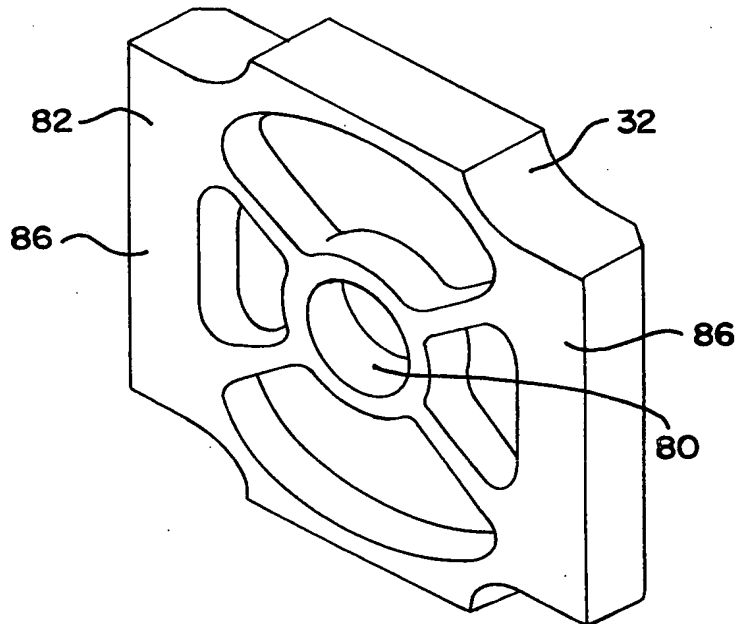




FIG. 11

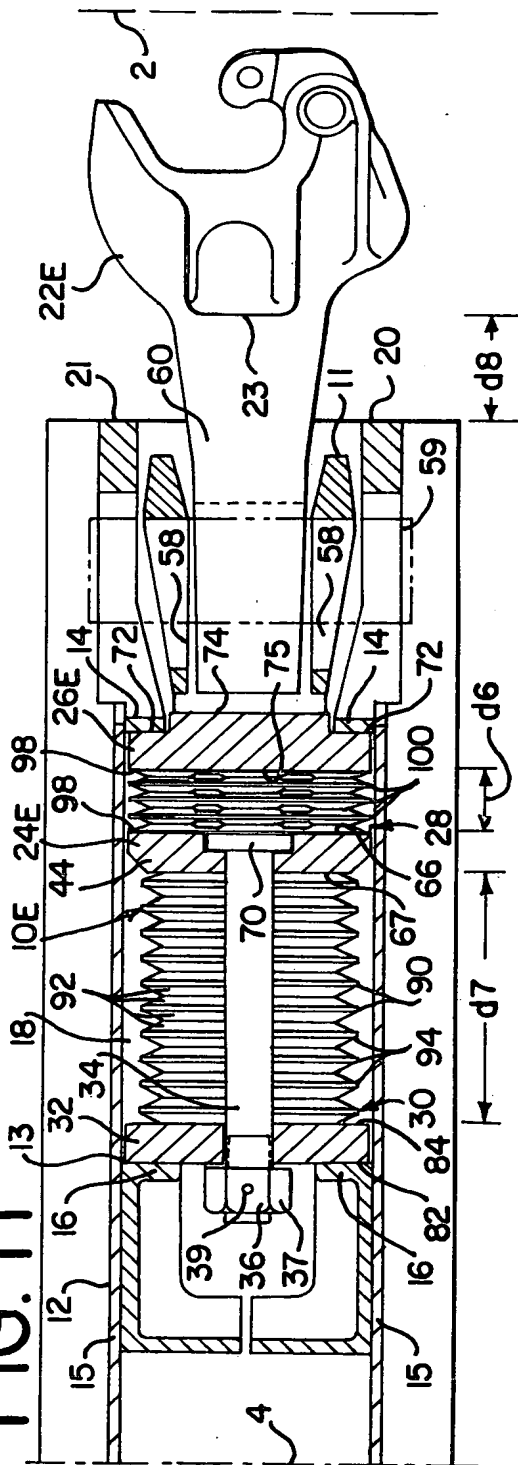


FIG. 12

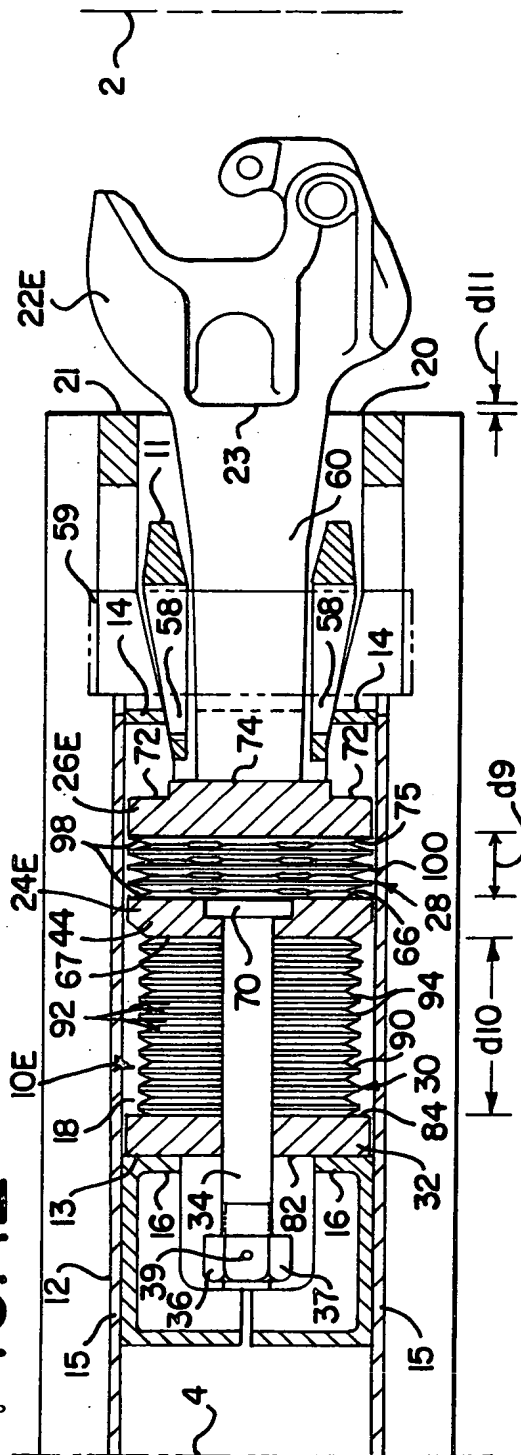




FIG. 13

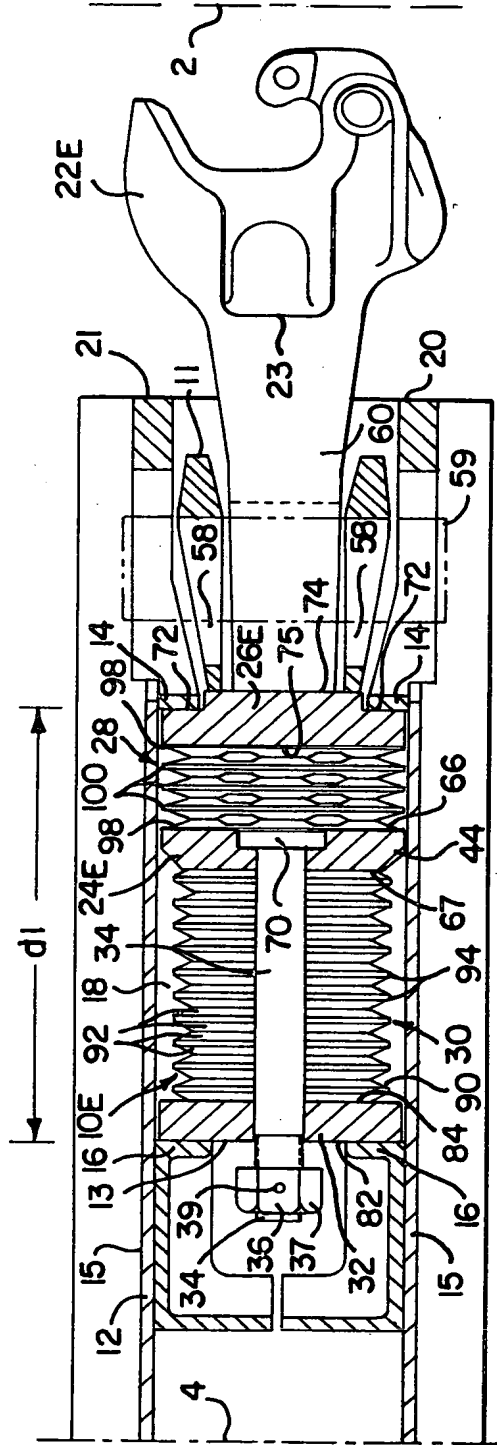


FIG. 14

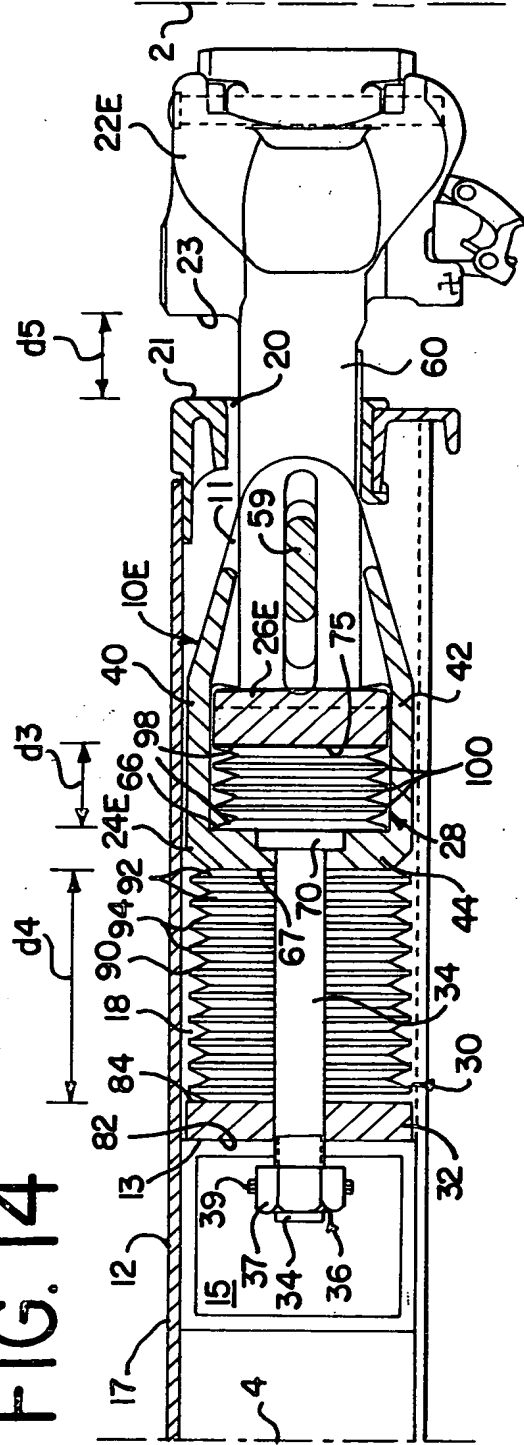




FIG. 15

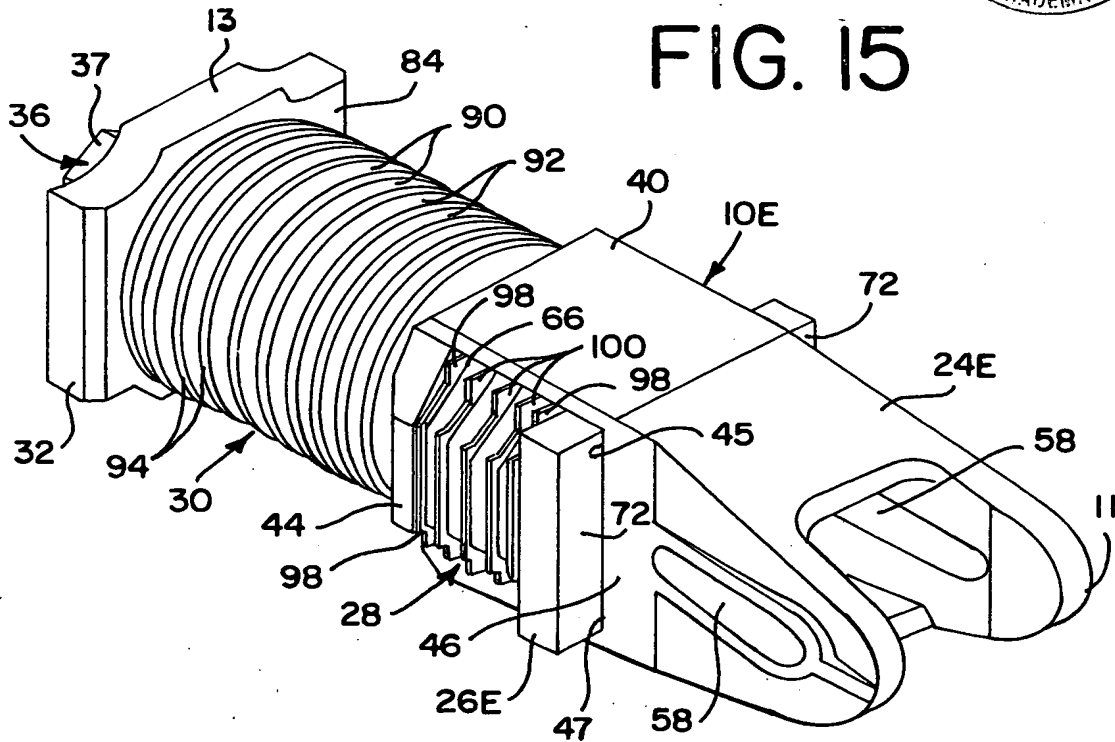


FIG. 16

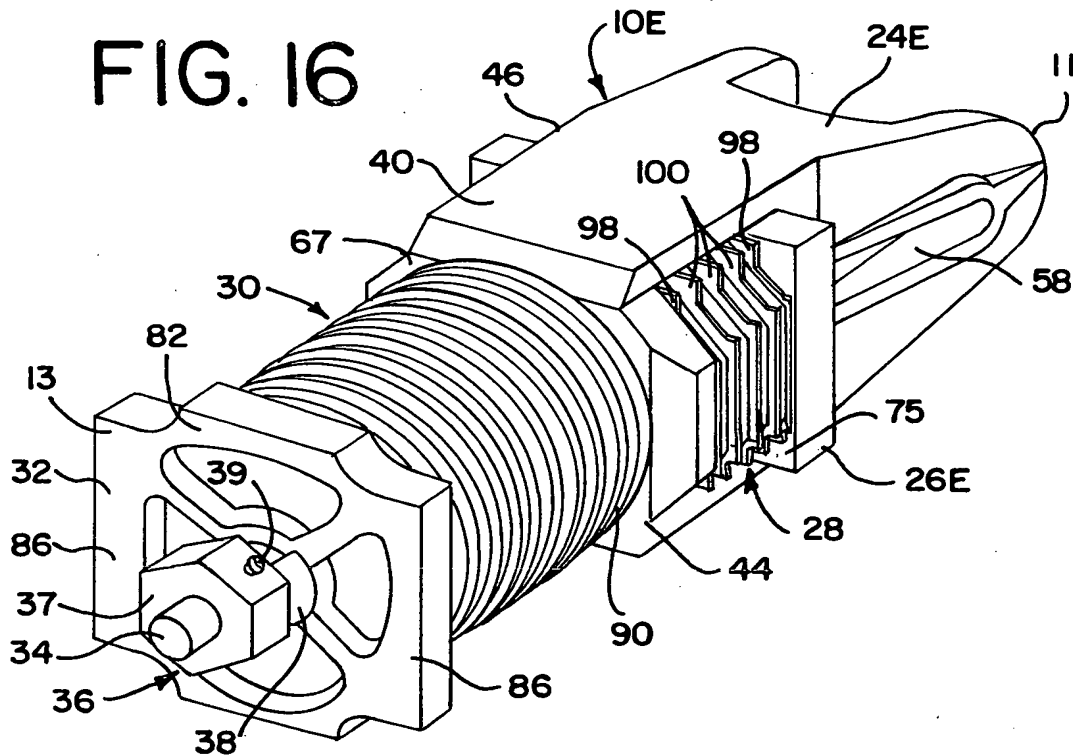




FIG. 17

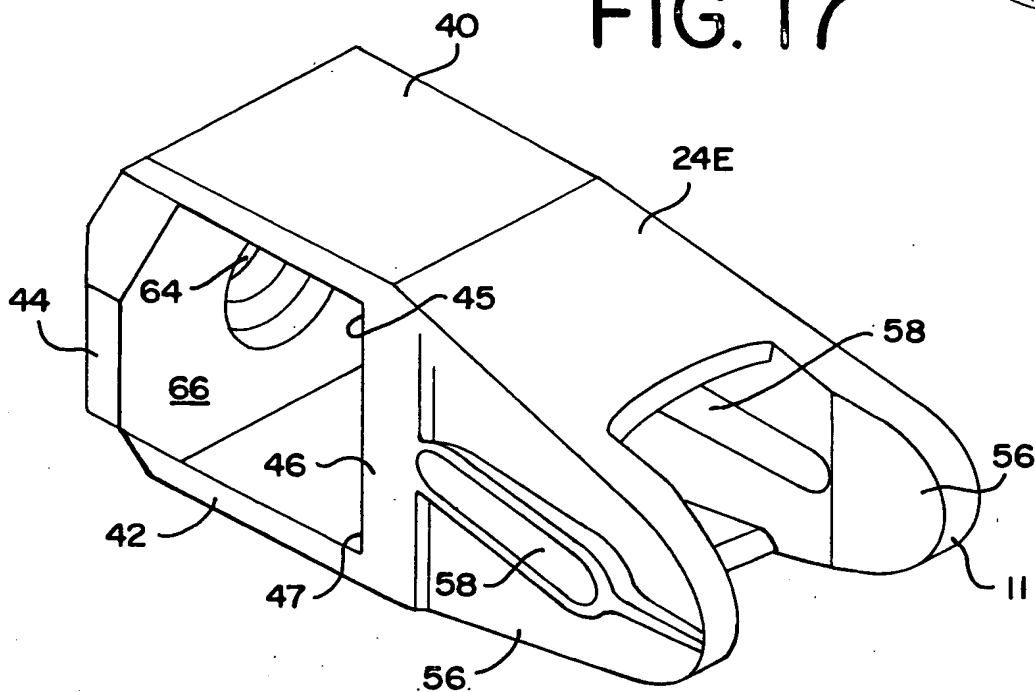


FIG. 18

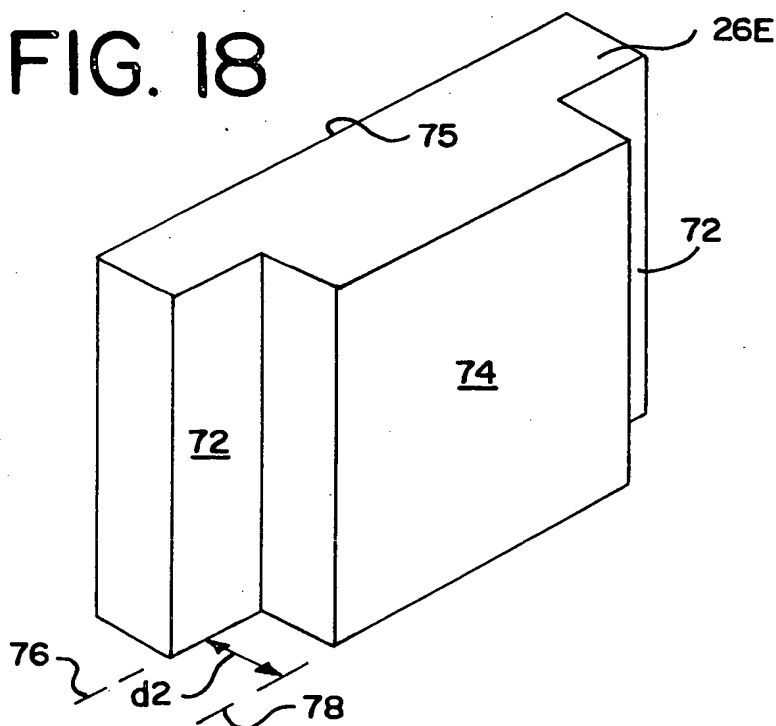




FIG. 19

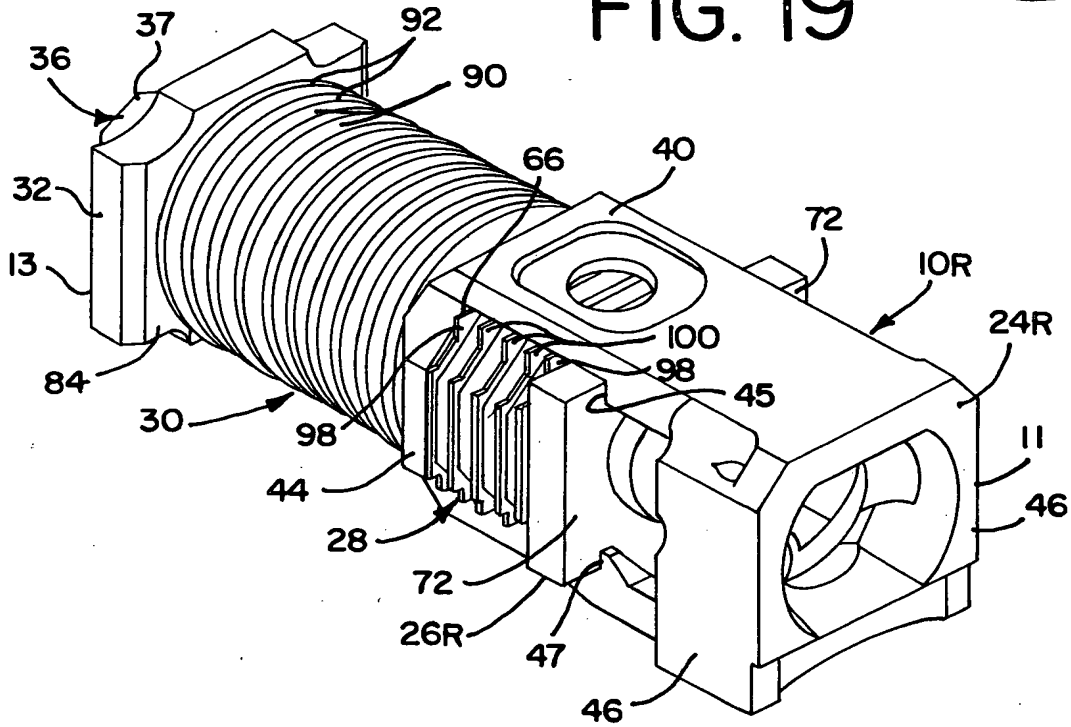


FIG. 20

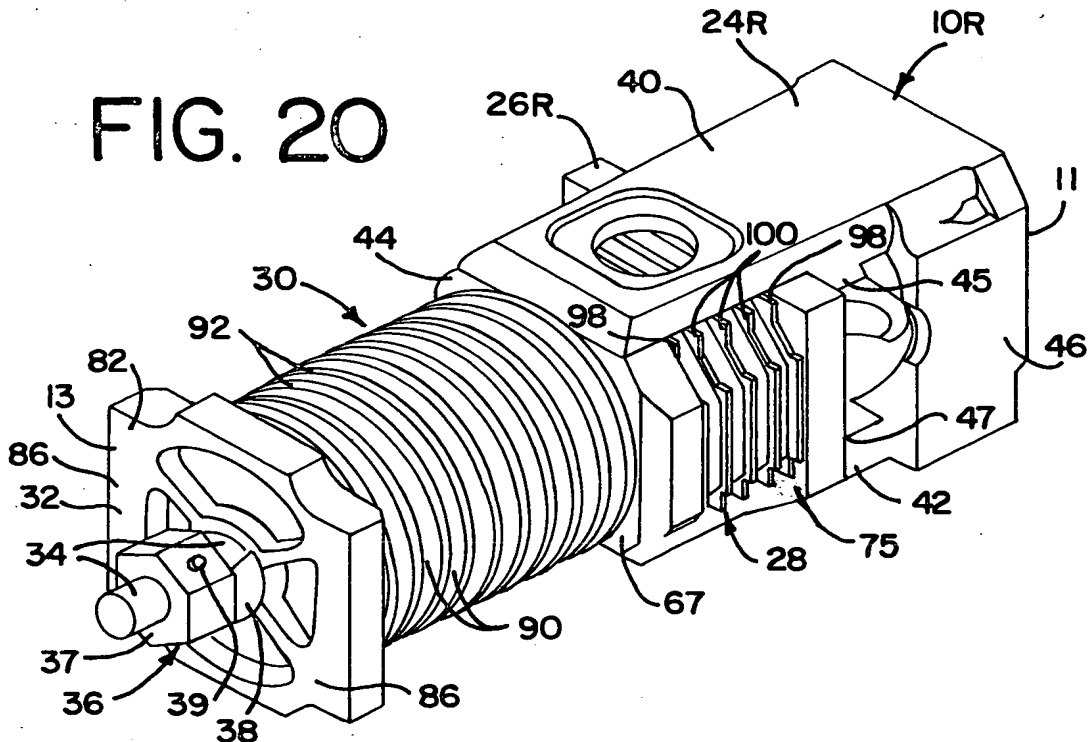




FIG. 21

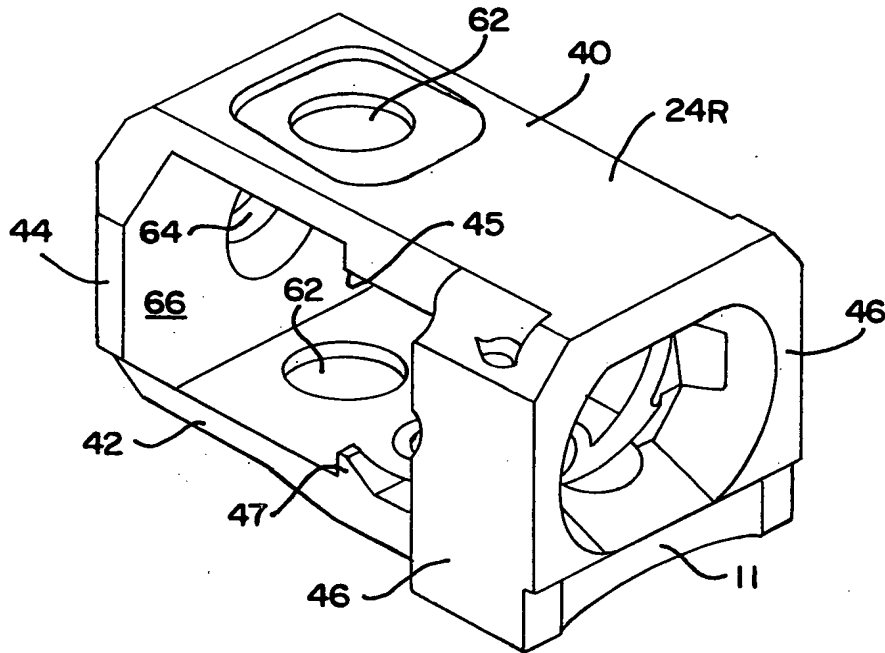


FIG. 22

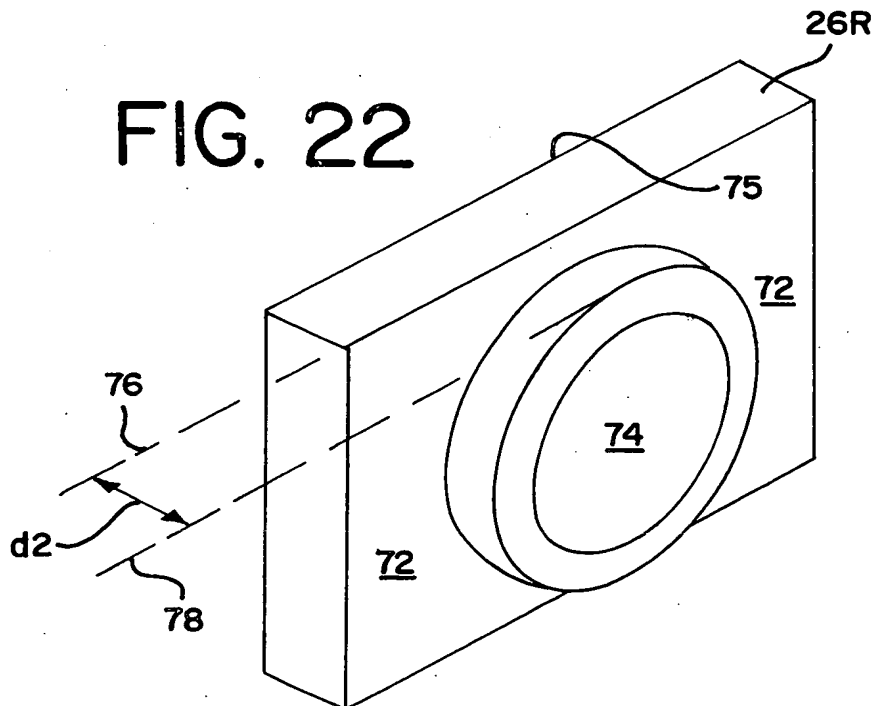




FIG. 23

STATIC CLOSURE/SPRING RATES
 10xMI-244, INSTALLED HEIGHT 13.375", 8
 4xMI-228, INSTALLED HEIGHT 4.875"

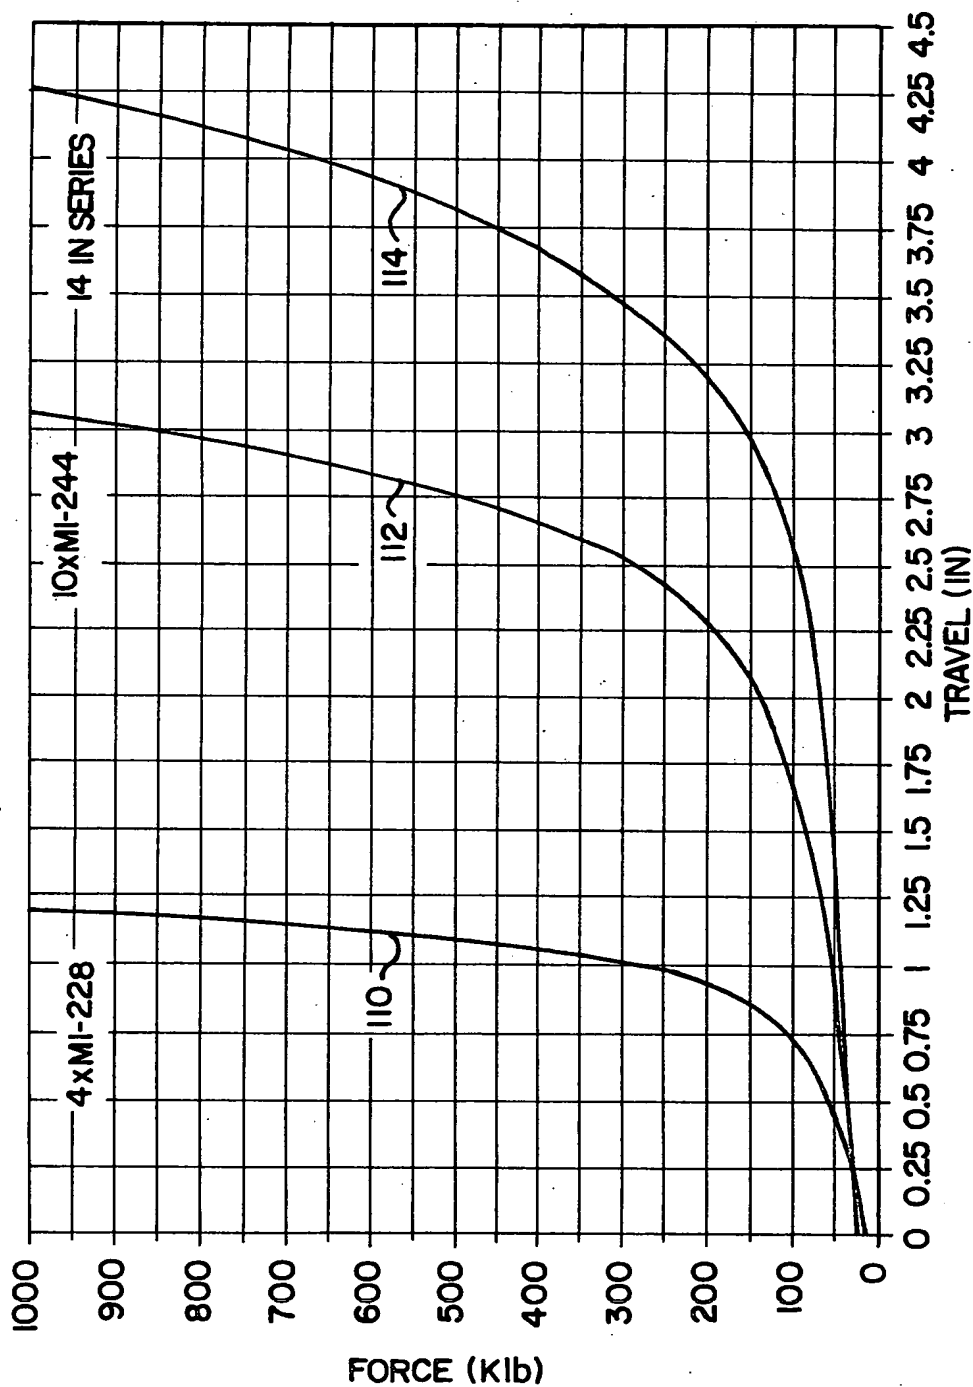




FIG. 24

DAMPING CHARACTERISTICS

SPEED (MPH) 5.48

MAX FORCE (KLBS)= 435.13 MAX TRAVEL (IN)= 3.66

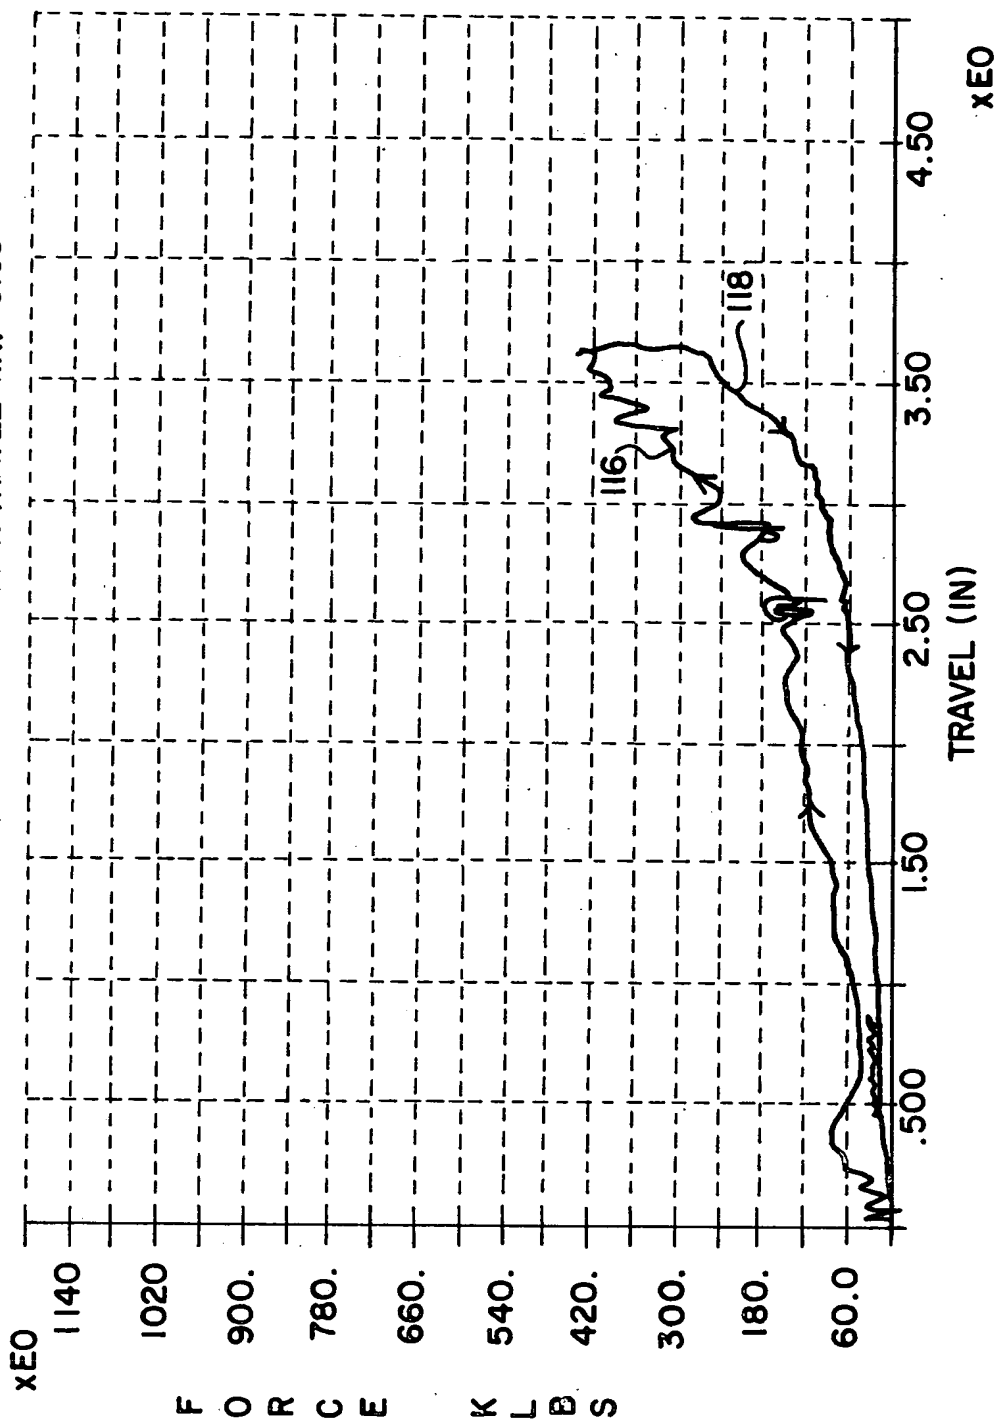


FIG. 25

DAMPING CHARACTERISTICS

SPEED (MPH) 6.05

MAX FORCE (KLBS)=558.86

MAX TRAVEL (IN) = 3.97

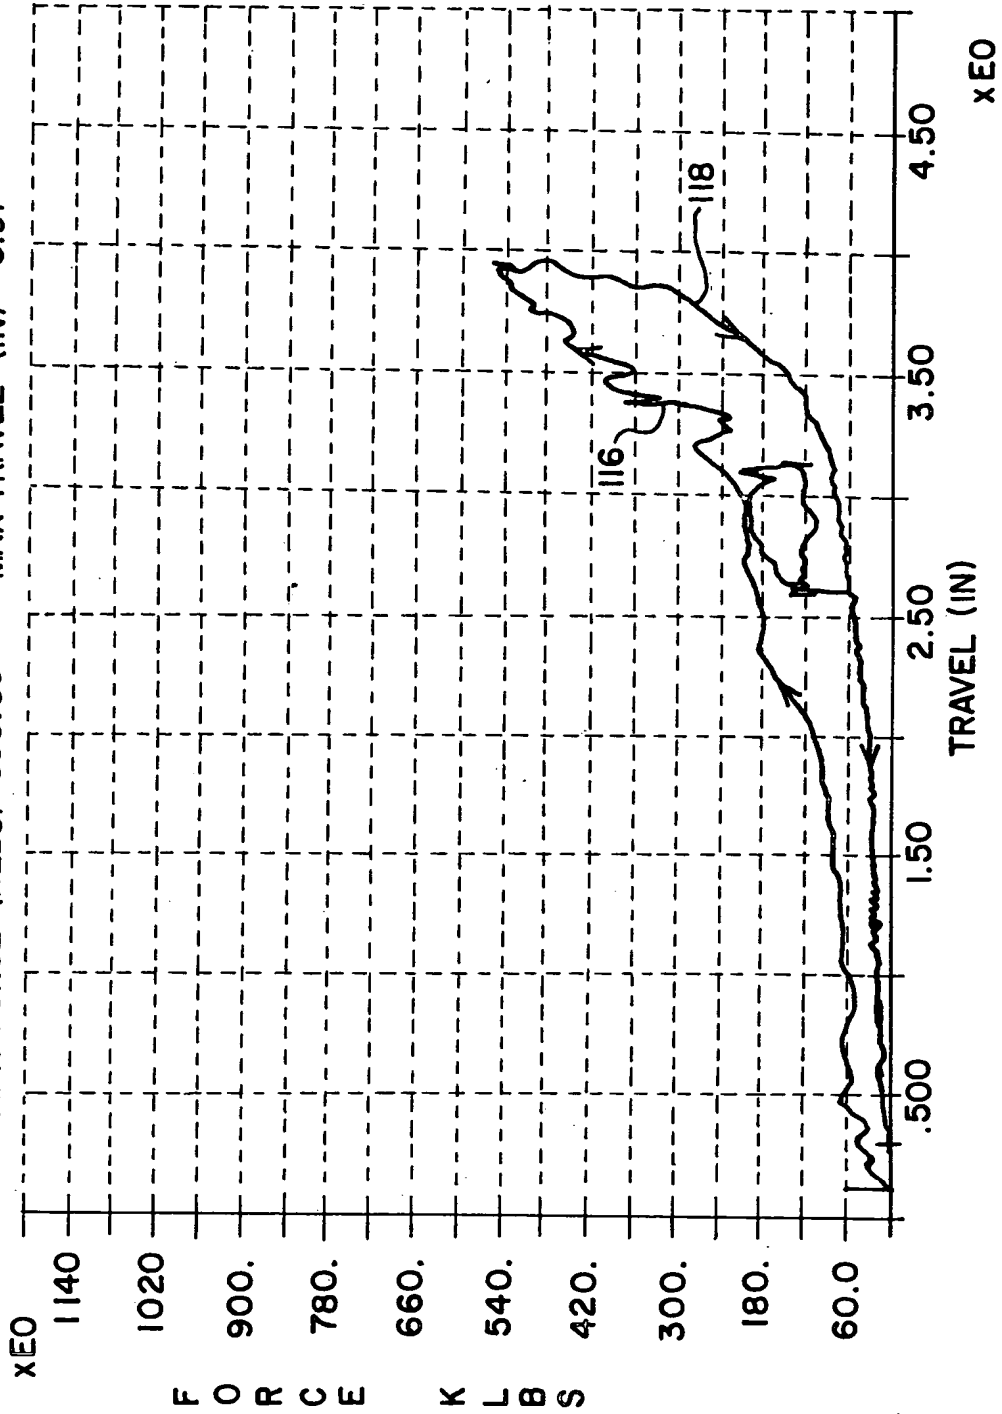




FIG. 26

DAMPING CHARACTERISTICS

SPEED (MPH) 6.52

MAX FORCE (KLBS) = 681.91

MAX TRAVEL (IN) = 4.11

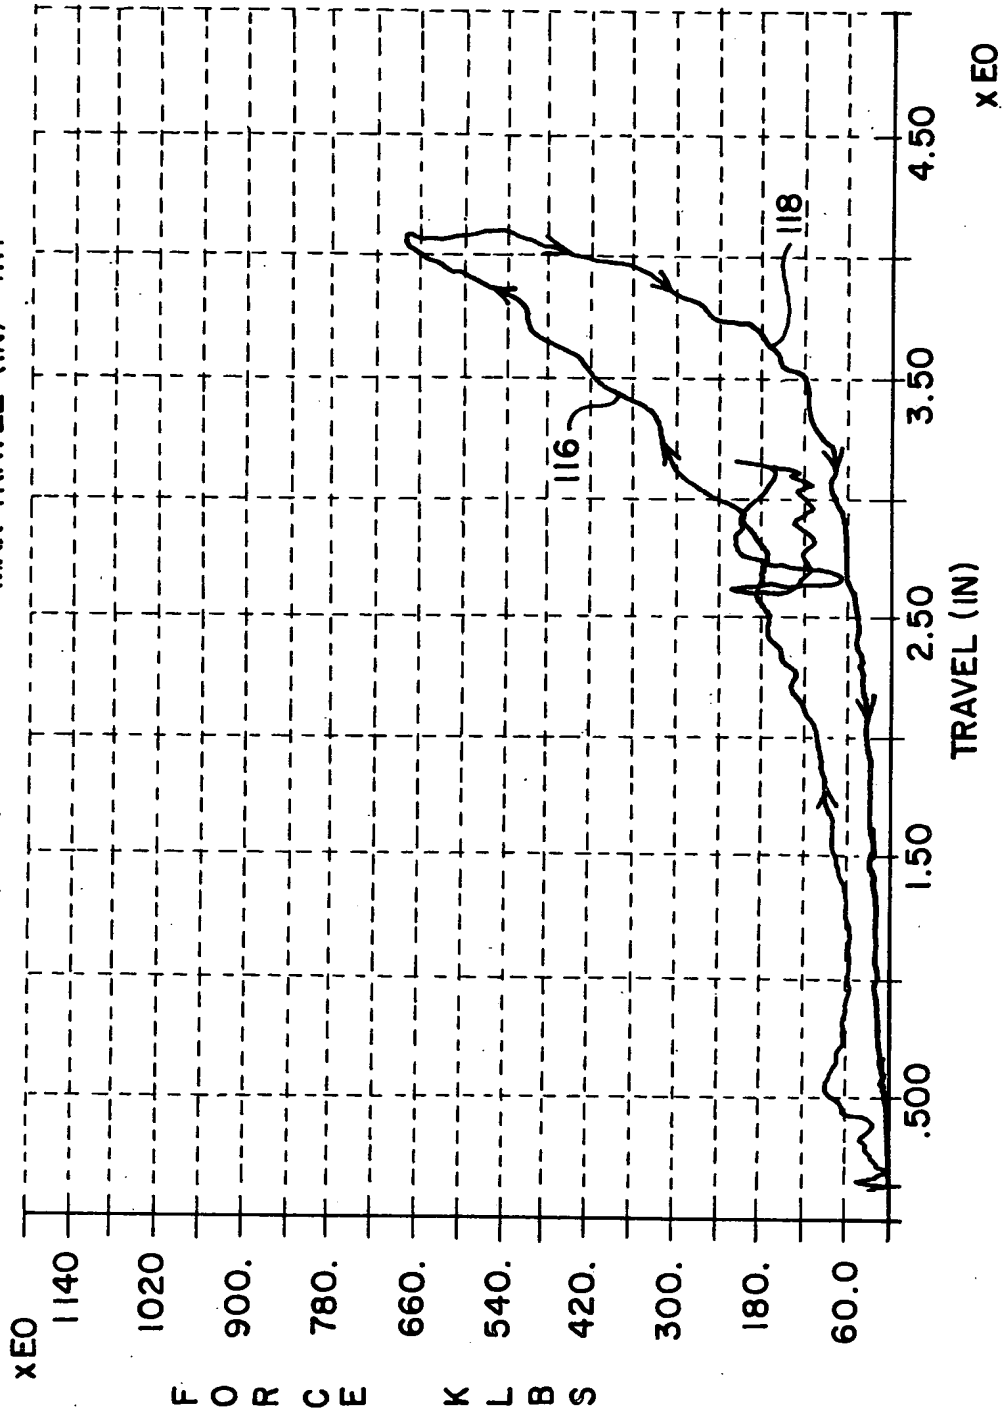


FIG. 27

DAMPING CHARACTERISTICS

SPEED (MPH) 7.16

MAX FORCE (KLBS) = 809.58

MAX TRAVEL (IN) = 4.22

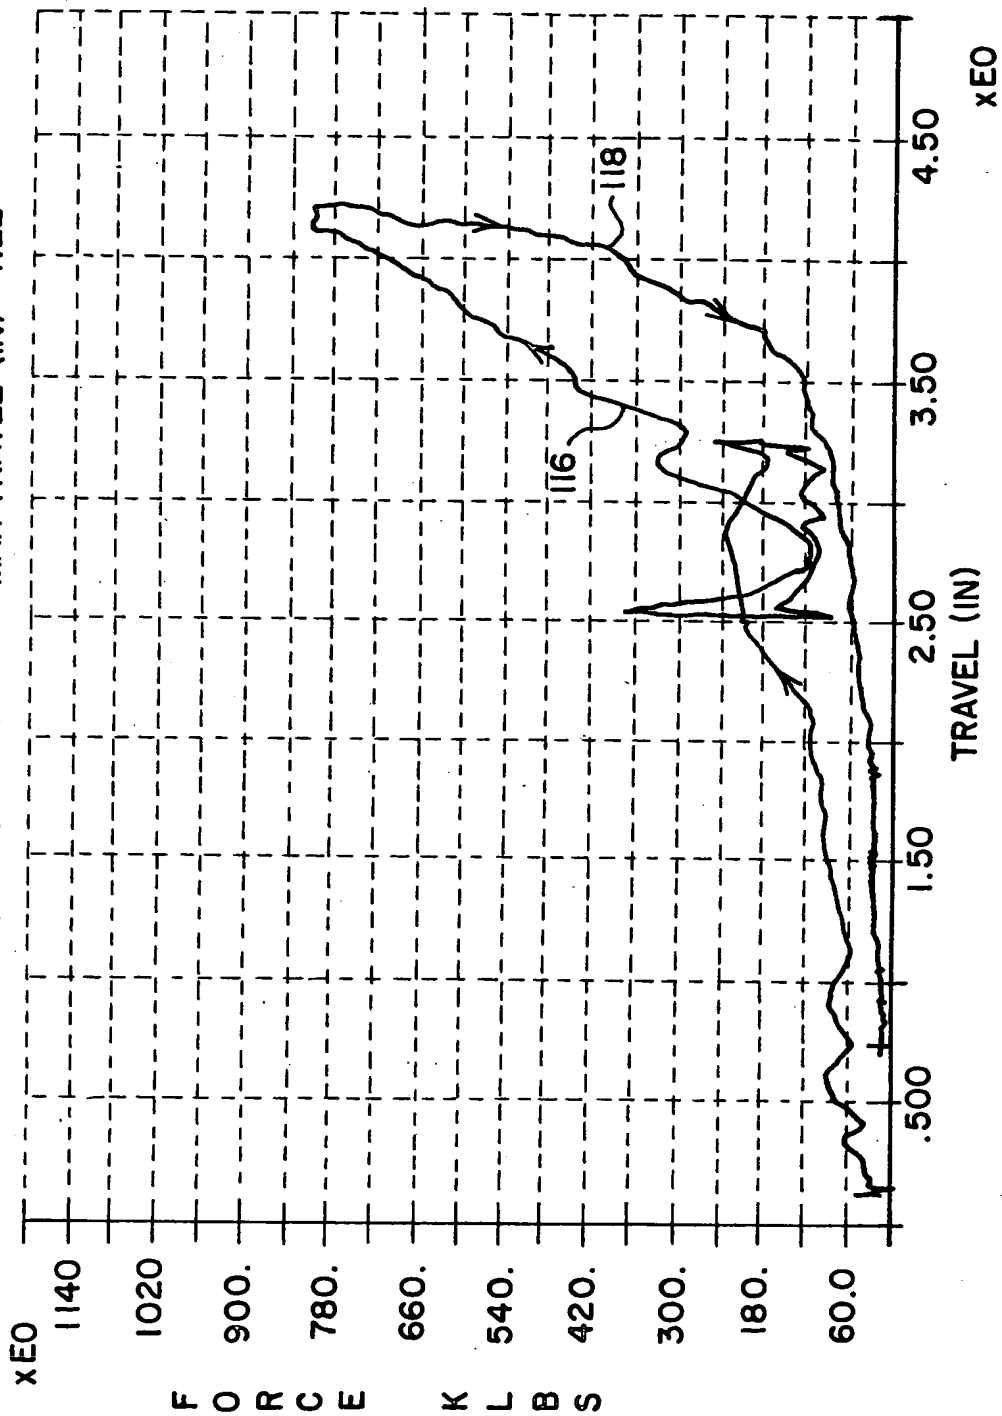


FIG. 28

DAMPING CHARACTERISTICS

SPEED (MPH) 7.63

MAX FORCE (KLBS) = 914.25 MAX TRAVEL (IN) = 4.33

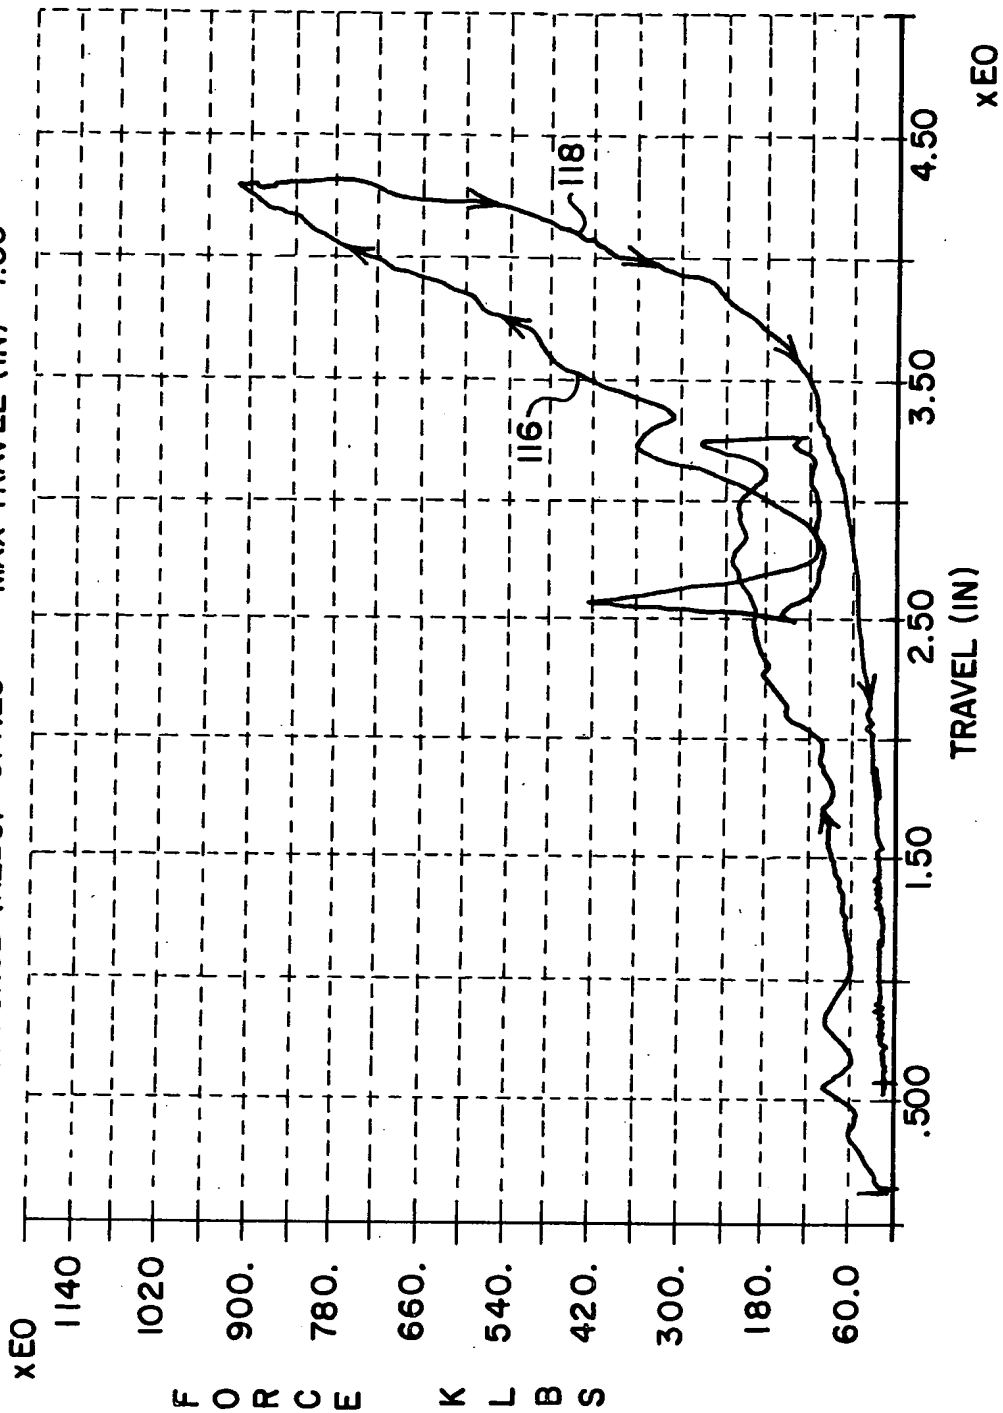




FIG. 29

DAMPING CHARACTERISTICS

SPEED (MPH) 8.17

MAX FORCE (KLBS) = 1018.88 MAX TRAVEL (IN) = 4.46

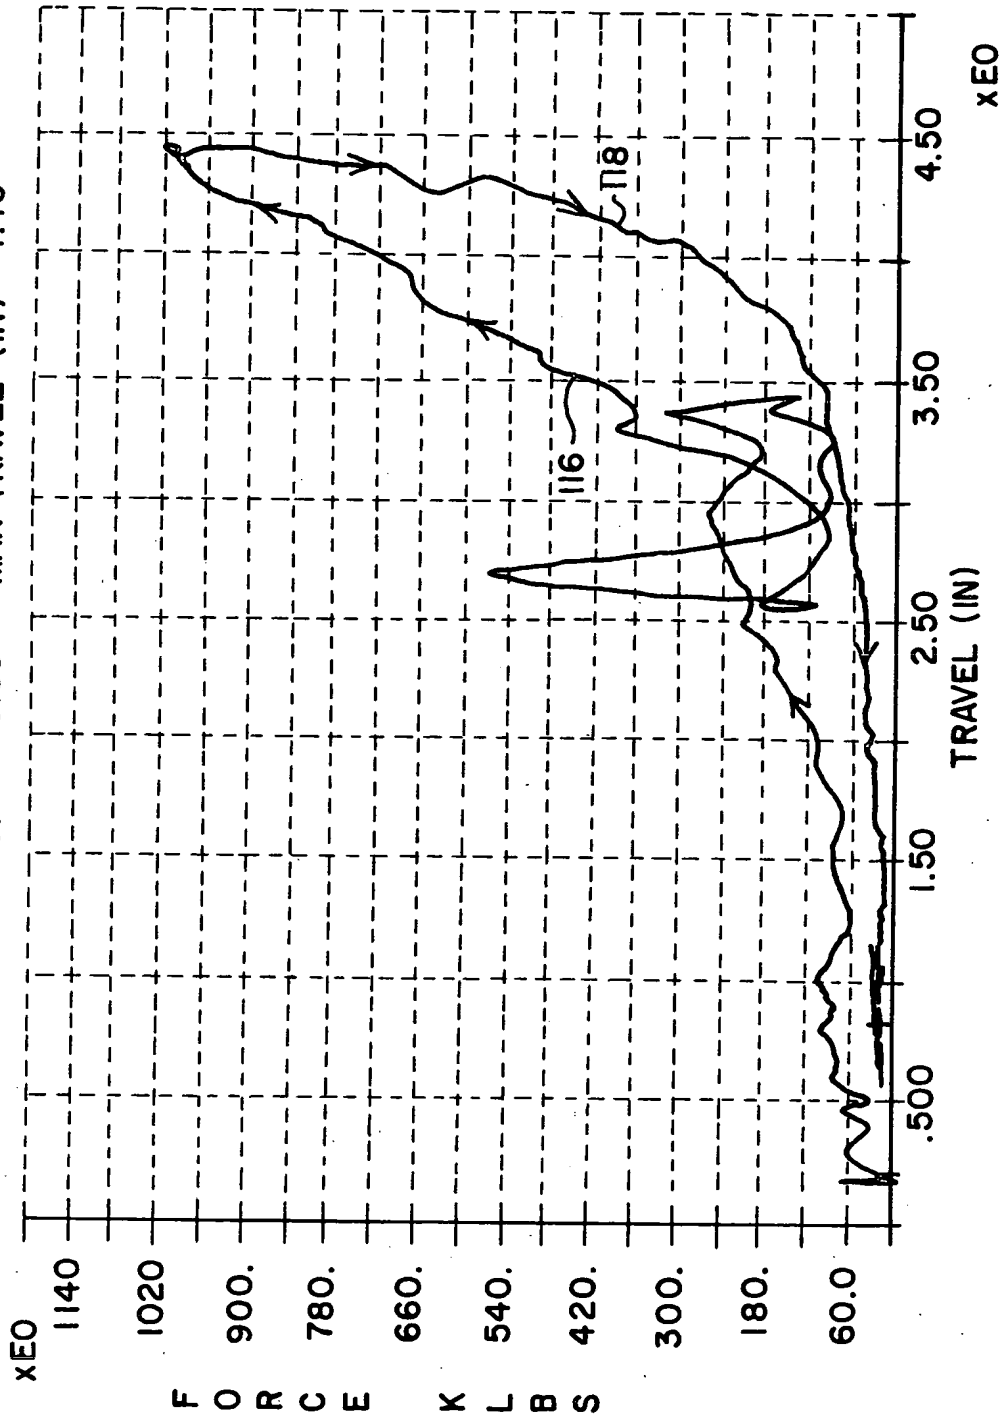




FIG. 31

FIG. 30

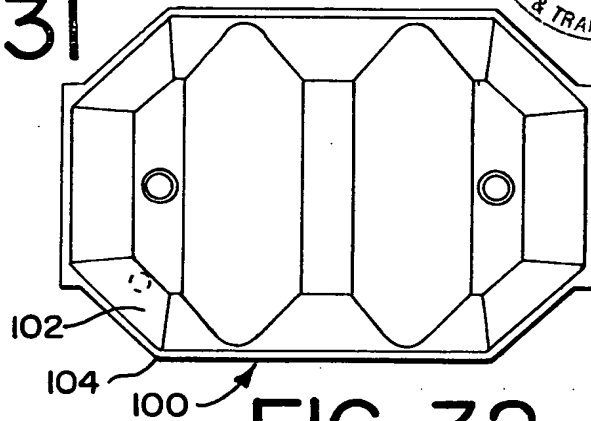
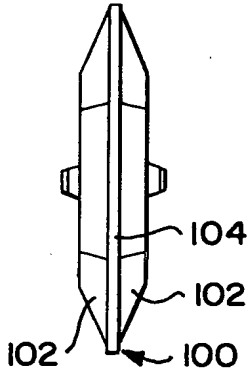


FIG. 32

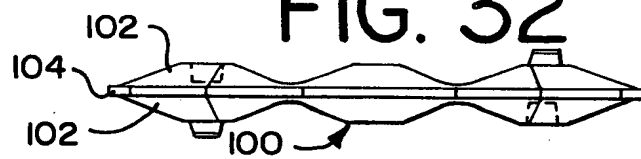


FIG. 33

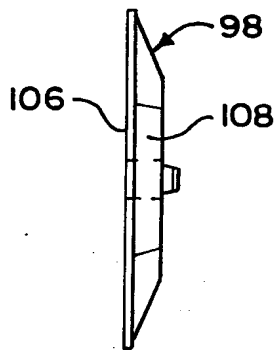


FIG. 34

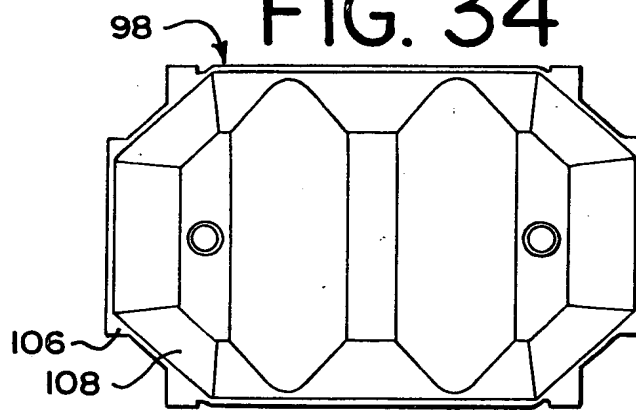


FIG. 36

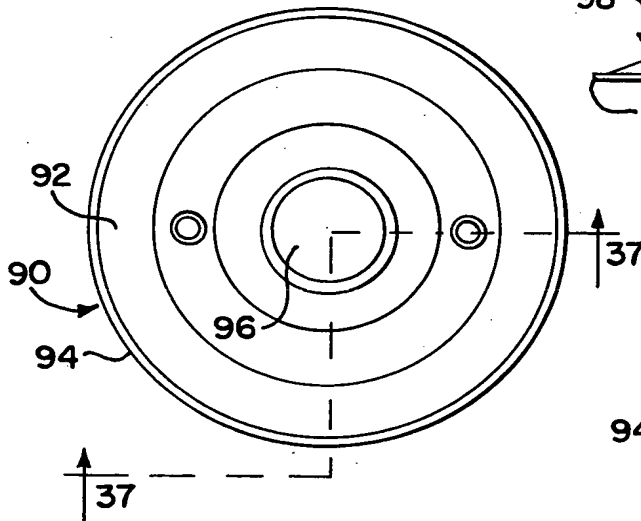


FIG. 35

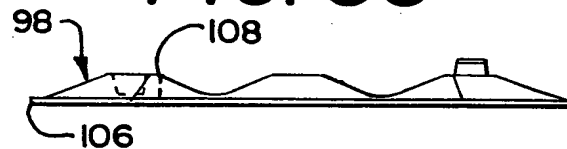


FIG. 37

